

Fig. 5 is a cross-sectional view of the display device 100. The display device 100 includes a display area 501, a bezel 509, a frame 510, and a bracket 508B. The bezel 509 is divided into a top part 509A and a bottom part 509B. The frame 510 is divided into a top part 510A and a bottom part 510B. The bracket 508B is used to secure the bezel 509 to the frame 510. A lightning bolt symbol 5101 indicates a connection to ground.

[illegible]



Fig. 16A

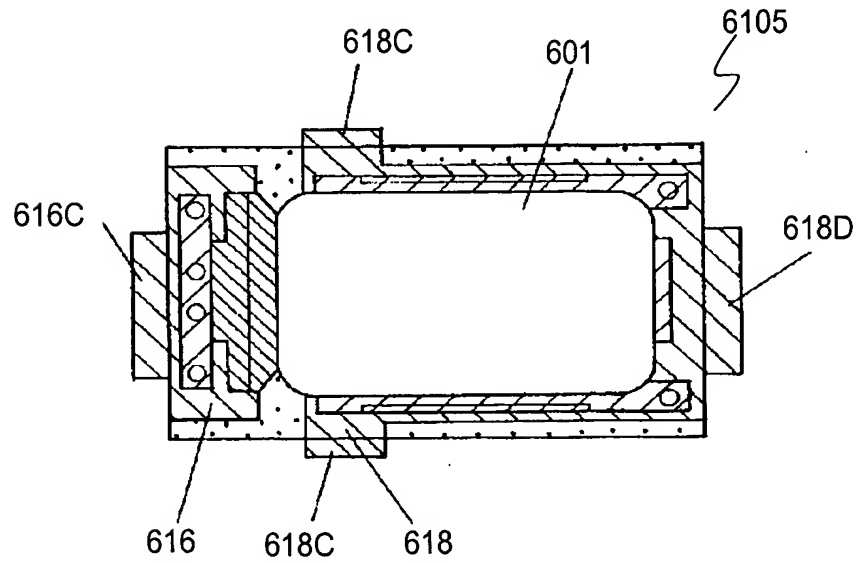


Fig. 16B

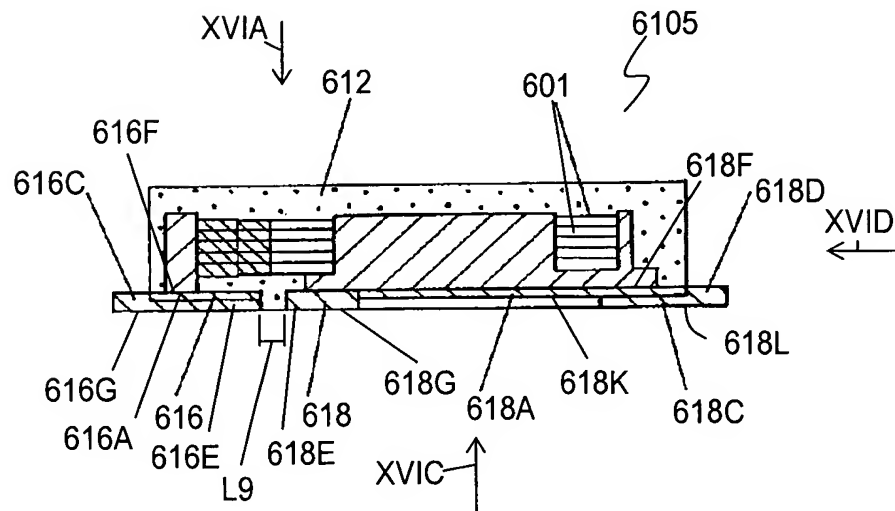




Fig. 17A

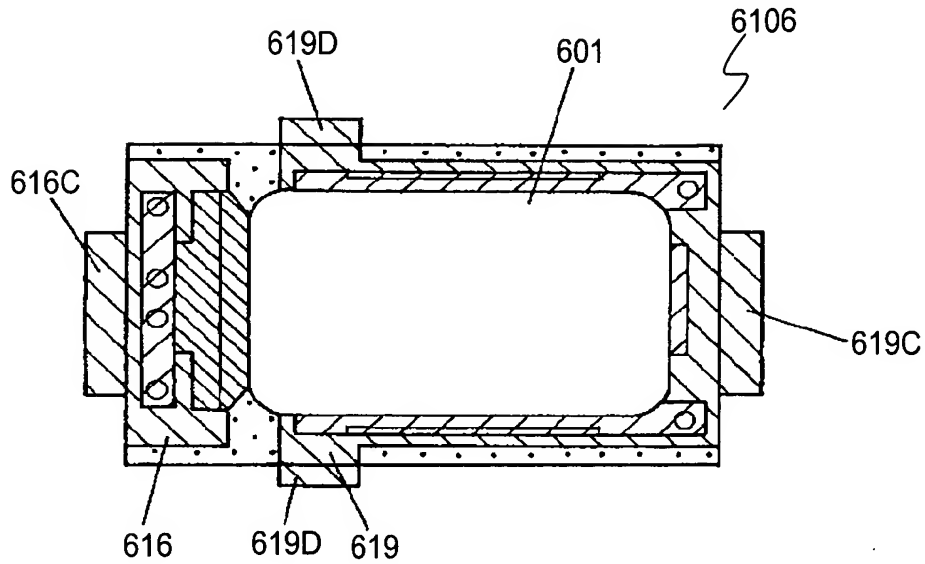


Fig. 17B

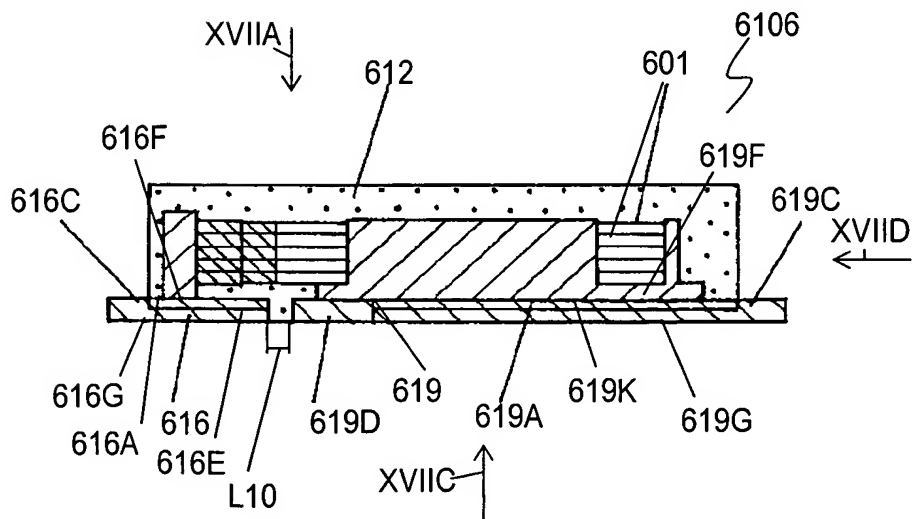




Fig. 19A

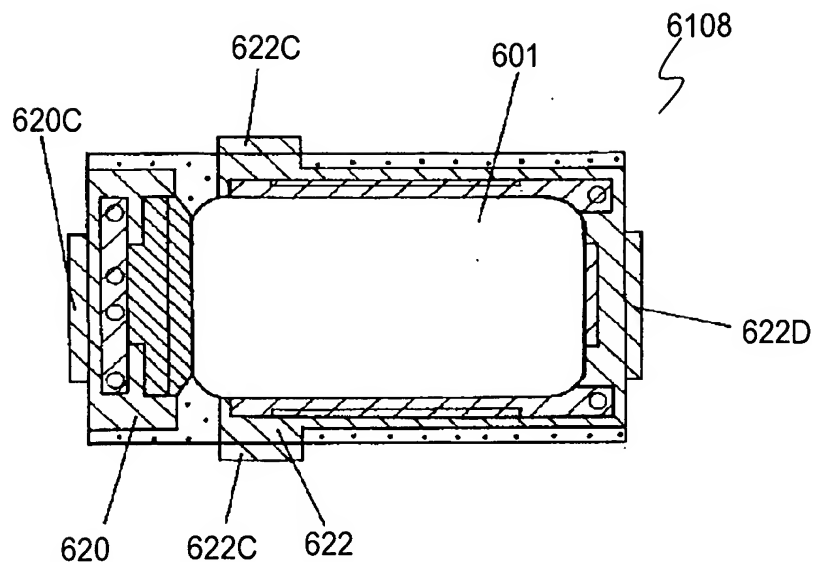


Fig. 19B

